

Miller Grip™


Friction Bolt Anchorage Connector


- **Portable/reusable anchorage connector**
- **Designed exclusively for use with a *FRICTION BOLT***

- A safe anchor point for a single user is established when the Miller® Grip™ anchor (Model #494) is inserted into a *friction bolt* with an outside diameter of 1.5 inches (39mm)
- **Multiple applications:** Mine shafts, railway or road tunnels and underground storage caverns
- The **reusable Miller Grip anchor** can be removed and simply re-installed in a new location
- Constructed of stainless steel, aluminum and other non-corrosive materials for a **longer service life**
- A **variety of connecting devices can be attached** to the Miller Grip anchor including shock-absorbing lanyards or self-retracting lifelines

Miller SkyWalker™ Temporary Horizontal Lifeline Kit

A unique temporary horizontal lifeline system that is quick and easy to install and **accommodates two workers, 310 lbs. (140.6kg) maximum capacity each**. Kit (DF494/60FT) includes 60 feet (18.3m) of galvanized wire rope lifeline, turnbuckle, shock absorber, combination clamp and thimble, wire rope clip, anchor shackle, and two Miller Grip anchorage connectors (Model #494).

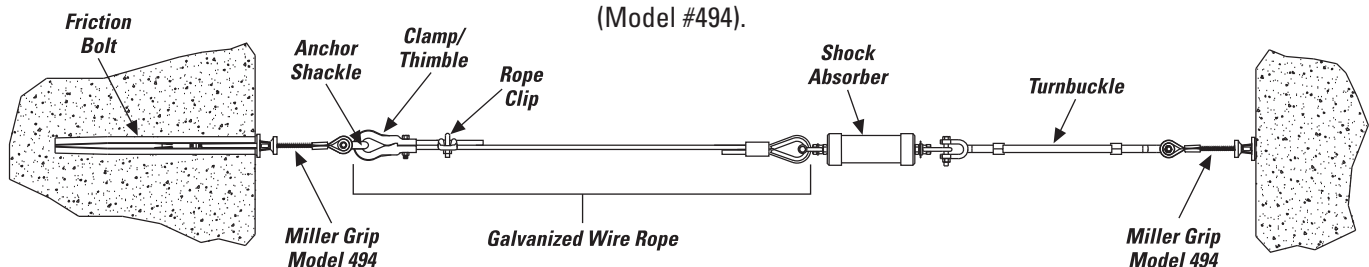

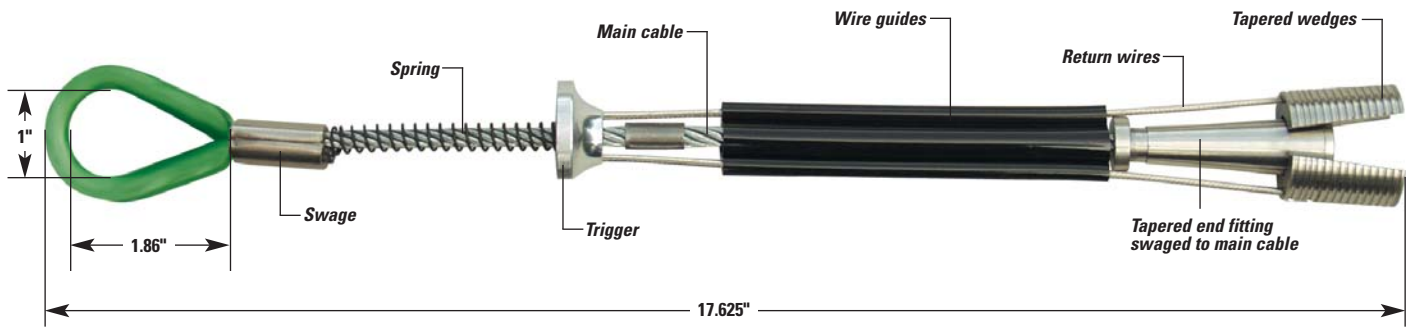

MILLER® GRIP™ FRICTION BOLT ANCHORAGE CONNECTOR

Model No.	Weight	Description
494	1 lb.	Grip anchor for single user 310 lbs. (140.6kg) maximum capacity, designed exclusively to accommodate a friction bolt with an outside diameter of 1.5 inches (39mm)
DF494/60FT	29 lbs.	SkyWalker™ Temporary Horizontal Lifeline Kit includes 60 feet (18.3m) of galvanized wire rope lifeline, turnbuckle, shock absorber, combination clamp & thimble, wire rope clip, anchor shackle and two Miller Grip anchorage connectors (Model #494) to accommodate two friction bolts with outside diameters of 1.5 inches (39mm)

Miller Grip Anchorage Connectors meet all applicable OSHA and ANSI standards, including ANSI Z359.1.

Other Miller® products to consider for use with the Miller® Grip™ Anchorage Connector



Miller® Python™ Ultra Harness

Designed for Superior Comfort, Fit & Safety Performance

- Interlocking **Quick-Connect Buckles** for ease of donning; dual-tab release mechanism prevents accidental opening
- **Comfort-Touch Back D-Ring Pad** designed with breathable material for cooler, extended wear comfort
- Patented **DuraFlex stretchable webbing** provides greater comfort, increases productivity, and improves safety
- **Cushioned tubular webbing** in the shoulder straps to minimize neck and shoulder discomfort



BLACK RHINO™ Self-Retracting Lifeline

Introducing the smallest and lightest 9-foot cable lifeline on the market
The industry's first global retractable

- Designed to endure harsh environments
- Cable lifeline can provide durability and reliability for **concrete construction, welding, steel erection** and **warehouse** applications
- Repairable; no annual factory recertification required – lowering cost of ownership
- Arrests free falls within inches

Miller brand products meet all applicable OSHA, ANSI and CSA requirements.

This equipment should only be used after reading the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.



Ask the Expert ... Ask Miller.

800/873-5242
or 814/432-2118

Fax 800/892-4078
or Fax 814/432-2415

www.millerfallprotection.com



For more information or to place an order, please contact your Miller® distributor:

LMGFBAC/1103/15M/RPI