

**New!**

# Miller ShadowLite™

## **B E A M   A N C H O R**


### **Fall Protection for Iron Workers**

#### **Features**

- New bronze clamping feet glide easily along a beam. Low coefficient of friction enables the unit to glide better than most competitive units constructed with alternate materials.
- Up to 25% lighter weight than most beam anchors on the market
- New quick-click adjustment offers greater versatility on the job site
- Unique positive-locking engagement system for I-beam fall protection safety
- High-strength bronze and aluminum construction for longer service life
- Accommodates both snap hooks and carabiners for ease of use
- Rated to 400 lbs. capacity
- Meets applicable OSHA and ANSI (including Z359.1) requirements

The **Miller ShadowLite Beam Anchor** connects to flanged beams ranging from 3 inches to 14 inches wide and flanges up to 1-1/4 inches thick. Once locked onto the beam, the anchor grips the beam securely, yet moves freely with the worker along the beam to promote safety.

It can be quickly and easily installed on the bottom flange of an overhead horizontal I-beam, or when an overhead anchorage doesn't exist, attached to the top flange of a horizontal I-beam at the worker's feet.

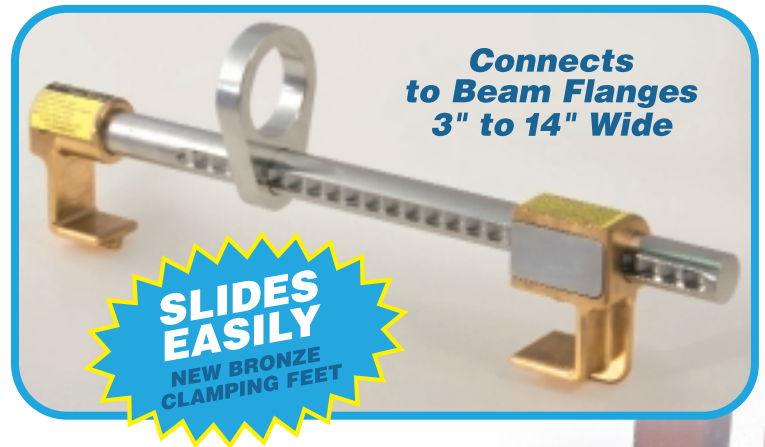

947K/6FTBL



# Miller ShadowLite™

## BEAM ANCHOR



Integral Connection Point

An integral connector provides a compatible connection point for Miller Manyard, Manyard II, SofStop® and Titan By Miller™ shock-absorbing lanyards. These lanyards can be ordered together with the ShadowLite Beam Anchor to form a fall protection system ready for harness connection.


When the ShadowLite Beam Anchor is attached at a worker's feet, a double shock-absorbing lanyard is required to keep fall arrest forces within OSHA requirements.

940WLS/6FTGN - Miller MAX SofStop® Lanyard



T6111DP/6FT - Titan X2 Double Pack Lanyard

### ShadowLite Beam Anchor Specifications

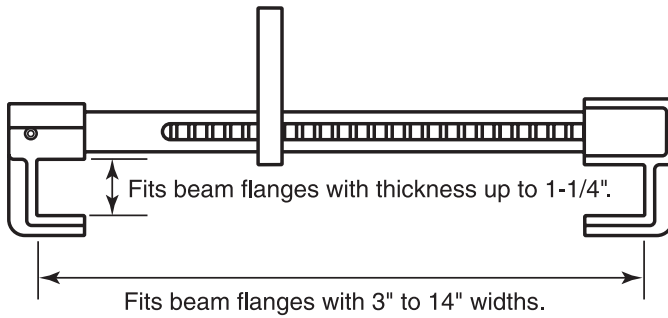

#### Materials and Specifications

Clamping Feet	Bronze
Support Shaft Integral Release Integral Connector	High-strength aluminum
Weight	4.28 lbs. (1.94kg)
Max. Weight Capacity	400 lbs. (181.44kg)

Model No.	Description
8816-14	Lightweight, adjustable ShadowLite Beam Anchor. Also available as Titan model #T8816-14.
940WLS/6FTGN	6 ft. Miller MAX web lanyard with Double SofStop Shock Absorber and 2 locking snap hooks
980WLS/6FTGN	6 ft. Miller double-legged web lanyard with Double SofStop Shock Absorber and 3 locking snap hooks
T6111DP/6FT	6 ft. Titan web lanyard with X2 Double Pack Shock Absorber and 2 locking snap hooks
T6121DP/6FT	6 ft. Titan double-legged web lanyard with X2 Double Pack Shock Absorber and 3 locking snap hooks
940K/6FTBL	6 ft. Miller welding Kevlar®/Nomex® web lanyard with Double SofStop Shock Absorber and 2 locking snap hooks
947K/6FTBL	6 ft. Miller welding 1/4" wire rope lanyard with Double SofStop Shock Absorber and 2 locking snap hooks

Kevlar and Nomex are registered trademarks of E.I. DuPont.

*This equipment should only be used in conjunction with the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.*



Toll Free 800/873-5242 Fax 800/892-4078  
Phone 814/432-2118 Fax 814/432-2415



For more information or to place an order, please contact your Miller® distributor:

LMSBA/0605/20M/RPI