
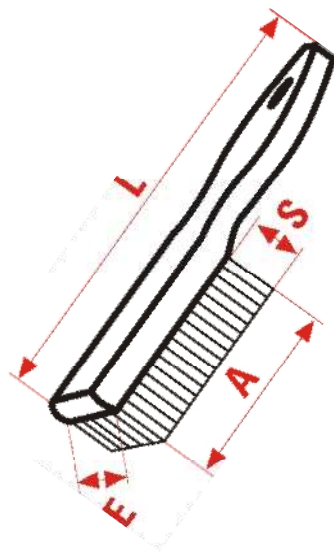


Date: 03/10/2017	<b>TECHNICAL DATA SHEET</b>
---------------------	-----------------------------

SIT code	Description	View & dimensions
<b>S34P600F0000</b>	<p><b>1801REF SPAZZ.A MANO 594 ACC035 12</b></p> <p>Hand brush, made with n°4 rows of straight tempered steel wire, Ø 0,35 mm, tufted on a wood body.</p> <p>Package : 12 pcs</p> <p>Article produced and checked according to: SIT quality management standard ISO 9001 : 2015.</p>	

<p><b>APPLICATION:</b></p> <ul style="list-style-type: none"> <li>Useful for middle duty brushing of smears and hard dirtiness from steel surfaces, hard masonry and stones for building constructions.</li> <li>Rust removal from flat surfaces, weld cleaning and any hand scraping .</li> </ul> <p><b>SAFETY:</b></p> <ul style="list-style-type: none"> <li>Save hands by safety gloves and wear safety glasses .</li> <li>Wear mask protection against dust inhalation .</li> <li>Caution: do not use in a potentially explosive atmosphere (ATEX classified zone) because sparks.</li> </ul>	 <p>L = 290 mm A = 135 mm S = 25 mm E = 32 mm</p>
--	--

**ATTACHMENT 1 \_ Certification of wire compliance EN 10204 2.1**

<b>SIT code</b>	<b>Description</b>
<b>S34P600F000</b>	<b>1801REF SPAZZ.A MANO 594 ACC035 12</b>

**We here declare that the article, according to the order confirmation, as described in the catalogue, is filled with straight wire, made of COLD HARD DRAWN CARBON STEEL, Ø 0,35 mm, OIL TEMPERED, having the features below.**

Denomination: oil tempered carbon steel, cold hard drawn, for springs.

Features

Diameter (mm): 0,35 ±0,010

Ultimate tensile strenght (N/mm<sup>2</sup>): 2450 - 2750

Chemical composition (%):

- C = 0,60 ÷ 0,75
- Si = 0,20 ÷ 0,25
- Mn = 0,60 ÷ 0,70
- P ≤ 0,030
- S ≤ 0,030

**SIT TECHNICAL DEP.T**

Ing. Lorenzo Giorgini