


[®]**VALLEY**

Welding Fall Protection Products

- Full-Body Harnesses
- Shock-Absorbing Lanyards
- Anchorage Connectors

**BLUE
WEBBING MAKES
INSPECTION
EASIER**

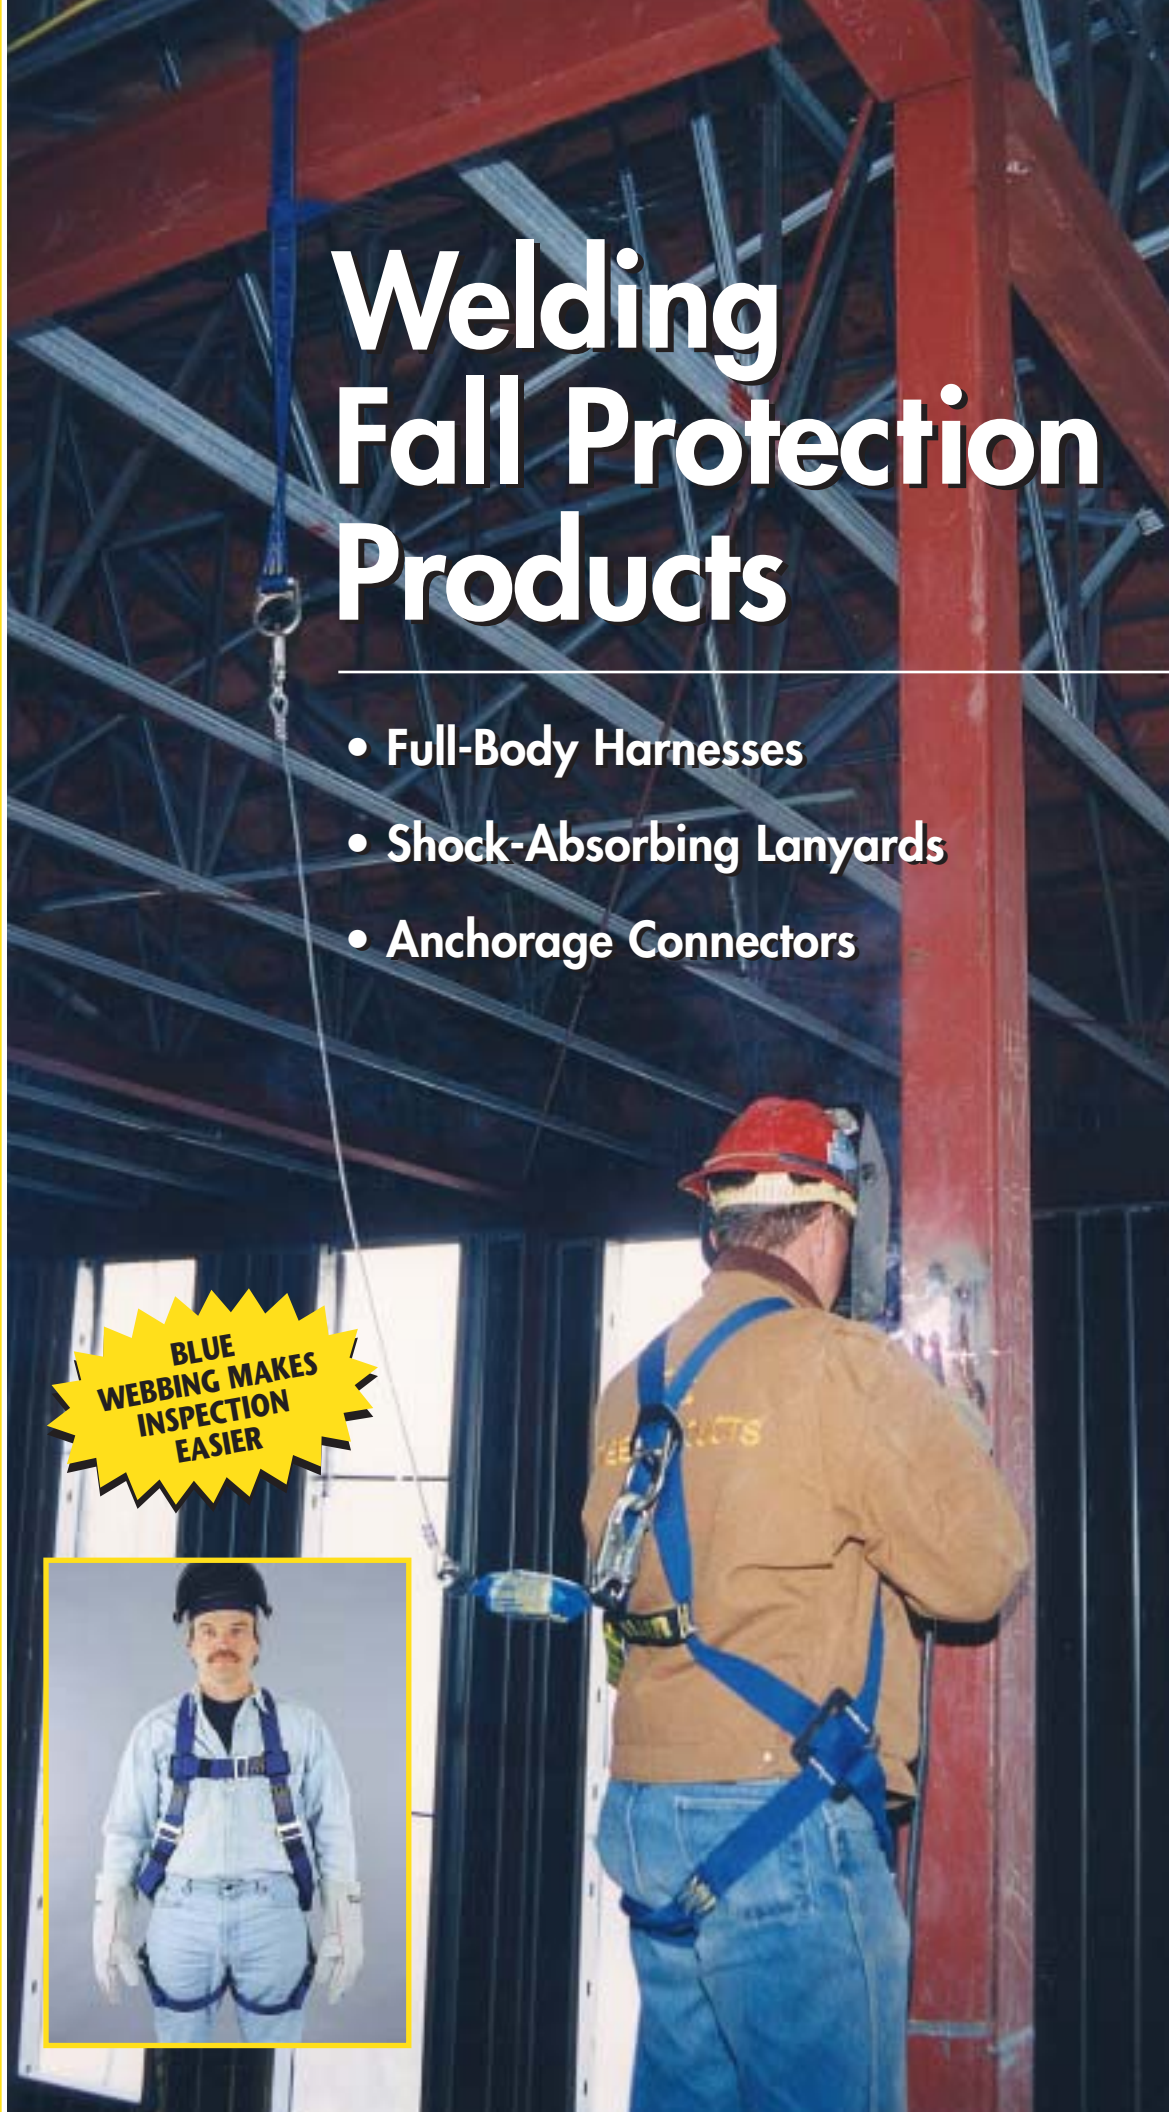

Fall Protection Products designed to meet the challenges of a harsh work environment.

Unique Features and Benefits . . .

Blue, flame-retardant Nomex® webbing with contrasting yellow Kevlar® core

- Special webbing protects against weld splatter
- Inner core adds strength and high temperature resistance
- Bright contrasting colors make inspection easier

Compliance and greater safety assured

- Meets National Fire Protection Association (NFPA) standards
- Meets OSHA, ANSI and CSA requirements

Complete flame-retardant fall arrest system kits available

- Specially designed harness
- Shock-absorbing lanyard
- Anchorage connector
- Durable carrying bag



**Shown with
Model 751K Harness
and Model 907K Lanyard**

Welder Full-Body Harnesses

- Specially designed with blue, flame-retardant Nomex® webbing and contrasting yellow Kevlar® core.
- Unique, durable Lexan® labeling with inspection grid.
- Forged steel sliding back D-ring.
- Available in Models 650K, 650K-7, 751K and 850K.



Model 650K



Model 650K-7



Model 751K



Model 850K

Welder Shock-Absorbing Lanyards

- Six-foot web and cable lanyards with SofStop Shock Absorber.
- Specially designed SofStop Shock Absorber with blue, flame-retardant Nomex® cover.
- Heavy-duty Kevlar back-up strap.
- Woven inner core that smoothly expands for greater shock absorption.
- Available in Models 907K, 913K and 940K.



Model 907K



Model 913K
(Model 940K available for 12 ft. free fall)

Welder Cross-Arm Strap Anchorage Connector

- Specially designed with blue, flame-retardant Nomex® webbing with contrasting yellow Kevlar® core.
- Six-foot length chokes around a variety of anchorage points.
- Available in Model 8185K.



Model 8185K

MODEL NO.	SIZE	FEATURES	HARDWARE		
			Chest	Shoulder	Legs
650K Harness	Universal	Lanyard clip; Pull-up shoulder adjustment; Sub-pelvic strap; Belt loops	Mating Buckles	Friction Buckles	Mating Buckles
650K-7 Harness w/side D-rings	Universal	Lanyard clip; Pull-up shoulder adjustment; Sub-pelvic strap; Belt loops; Two forged steel side D-rings	Mating Buckles	Friction Buckles	Mating Buckles
751K Harness	Semi-universal (S/M or L/XL)	Single adjustment point in legs; Economical design	Mating Buckles	–	Mating Buckles
850K Harness	Universal Also in M, L, XL	Pull-down shoulder adjustment; Sub-pelvic strap	Mating Buckles	Friction Buckles	Mating Buckles
907K Cable Lanyard w/SofStop Shock Absorber	6 ft. length	1/4" Steel cable lanyard; SofStop shock absorber w/Nomex® cover and Kevlar® safety strap; (2) Locking snap hooks with 3/4" gate openings			
913K Web Lanyard w/SofStop Shock Absorber	6 ft. length	SofStop shock absorber w/Nomex® cover and Kevlar® safety strap; (2) Locking snap hooks with 3/4" gate openings			
940K Web Lanyard w/Double SofStop Shock Absorber	6 ft. length	SofStop shock absorber (for 12 ft. free fall) w/Nomex® cover and Kevlar® safety strap; (2) Locking snap hooks with 3/4" gate openings			
8185K Cross-Arm Strap	6 ft. length	Loop on one end and D-ring on the other; 1-3/4" wide			
8477HG1 Millerhyde™ Carrying Bag	20"x10"x12"	Durable Millerhyde™ bag with heavy-duty zipper closure; Strong wrap-around carrying straps			

Kit 9751K



Miller Welder Kits

Miller Welder Kits include:

- Full-Body Harness
- Cable or Web Lanyard with SofStop Shock Absorber
- Cross-Arm Strap Anchorage Connector
- Durable MillerHyde™ Carrying Bag

WELDER KITS AVAILABLE

MODEL	HARNESS	LANYARD WITH SOFSTOP SHOCK ABSORBER
9650K	650K	907K (Cable)
9650KW	650K	913K (Web)
9650K-7	650K-7	907K (Cable)
9650K-7W	650K-7	913K (Web)
9751K <small>Model # changed from 9048/49</small>	751K	907K (Cable) <small>Available in sizes S/M or L/XL</small>
9751KW	751K	913K (Web) <small>Available in sizes S/M or L/XL</small>
9850K <small>Model # changed from 9050</small>	850K	913K (Cable)
9850KW	850K	913K (Web)

All kits include:

- 1.) Cross-Arm Strap constructed of Nomex® outer webbing with Kevlar® inner core; Loop on one end and D-ring on other; 1-3/4" wide.
- 2.) Durable MillerHyde® Carrying Bag (20"x10"x12"), with heavy-duty wrap-around carrying straps and zipper closure.

This equipment should only be used in compliance with the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality. Nomex® and Kevlar® are registered trademarks of E. I. DuPont. Lexan® is a registered trademark of GE Plastics.

LWH/299/15M/SP



Toll Free 800/873-5242 Fax 800/892-4078
 Phone 814/432-2118 Fax 814/432-2415



For more information or to place an order, please contact your Miller® distributor: